


PROTERMINAL


POLISHED and SATINED
STAINLESS STEEL AISI 304/1.4301-V2A

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles – tiles/parquet/ marble/laminates/carpeting /linoleum, etc.) of differing thickness.

PROTERMINAL in stainless steel is also used to protect steps and decking, as a floor edging profile and skirting covering. Match with **PROLISTEL** strips in stainless steel AISI 304-1.4301 V2A with polished or satin finish and in aluminium with anodised or polished chrome finish.

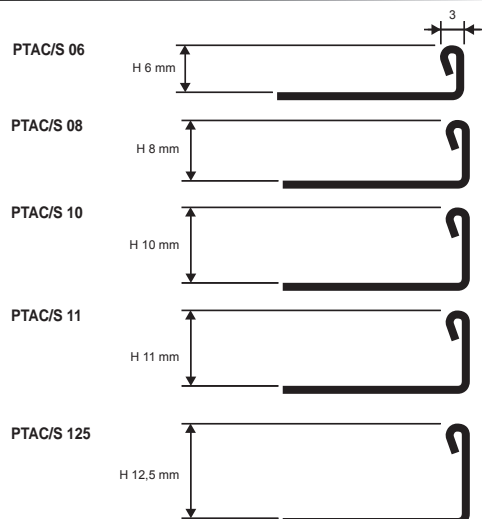

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

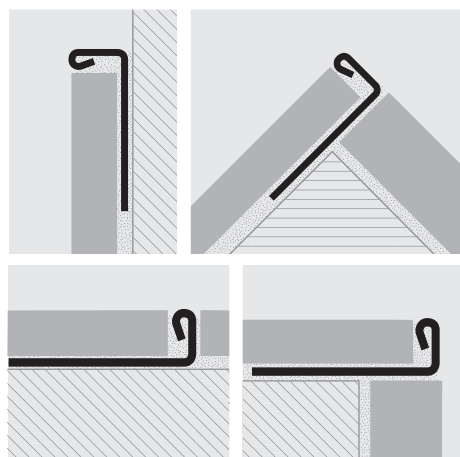

1: Choose the "PROTERMINAL" with the same height as the thickness of the covering. 2: Apply the adhesive onto the area of application of the profile. 3: Lay and align the profile pressing the perforated flange into the adhesive. 4: Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5: Use the adhesive to seal any empty interstices.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 40 Pcs - 108 LM - 10/10mm

Article	H mm		
PTAC 06	6		
PTAC 08	8		
PTAC 10	10		
PTAC 11	11		
PTAC 125	12,5		



SATINED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 LM - packaging 40 Pcs - 108 LM - 10/10mm

Article	H mm		
PTACS 06	6		
PTACS 08	8		
PTACS 10	10		
PTACS 11			
PTACS 125	12,5		

COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)



CURVE available, see page 138

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316/1.4404-V4A

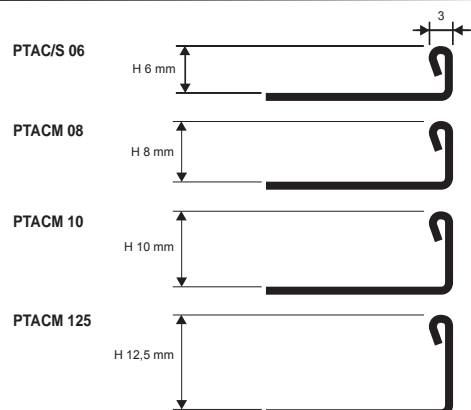

PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.



POLISHED STAINLESS STEEL AISI 316/1.4404-V4A with protective film
bar length 2,7 LM - packaging 40 Pcs - 108 LM - 10/10mm

Article	H mm		
PTACM 06	6		
PTACM 08	8		
PTACM 10	10		
PTACM 125	12,5		



COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)